



AIP DUTCH CARIBBEAN

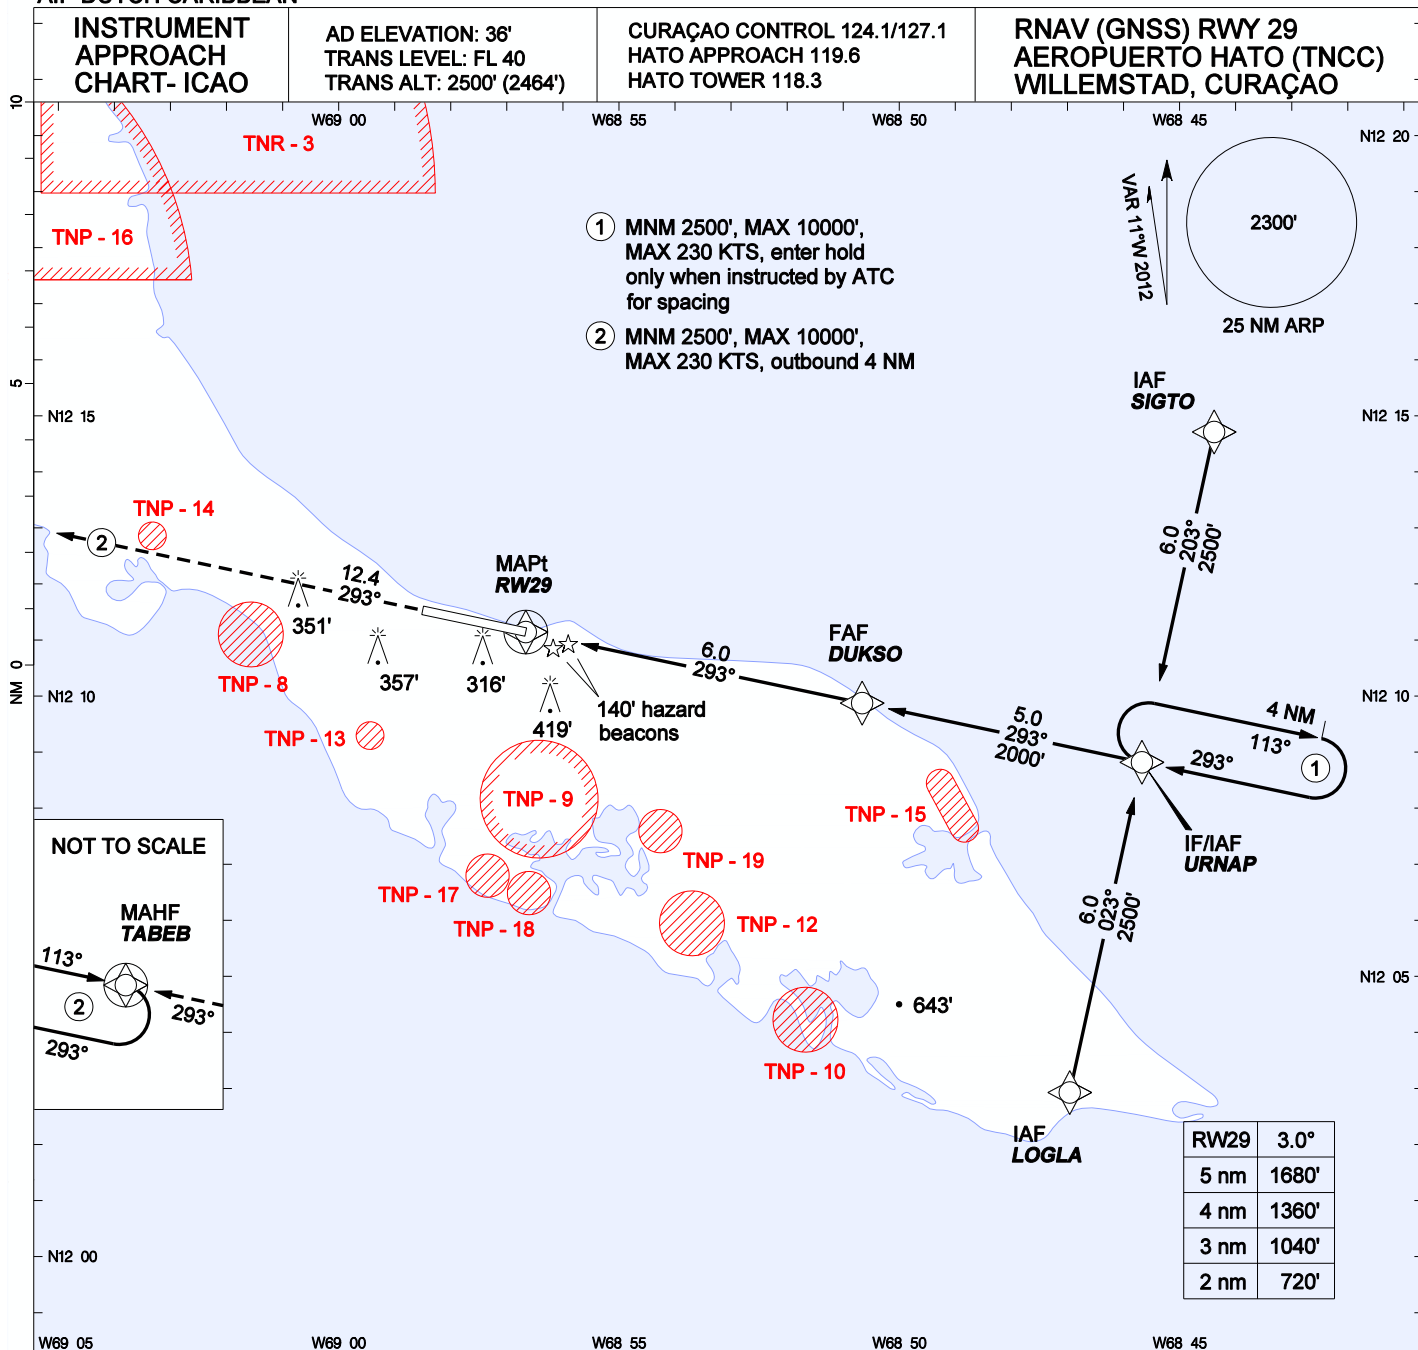

MISSED APPROACH: Climb to 2500' direct TABEB and hold, or as directed by ATC.

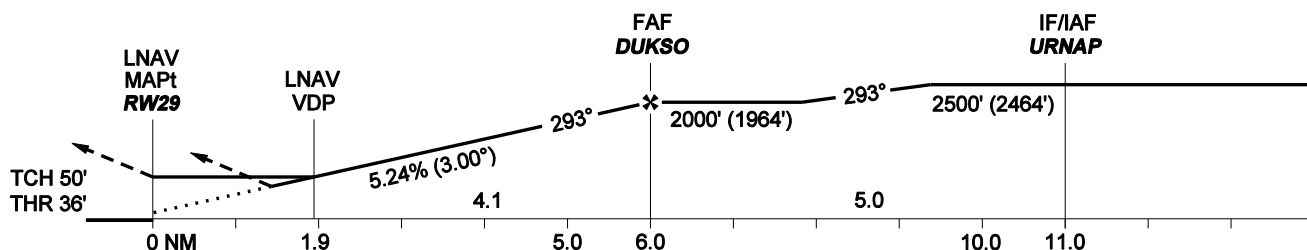

OCA(H)	A	B	C	D	GROUNDSPEED - DESCENT RATE						
LNNAV/VNAV	550' (514')	550' (514')	550' (514')	550' (514')	KNOTS	70	90	100	120	140	160
LNNAV	600' (564')	600' (564')	600' (564')	600' (564')	FT/MIN	372	478	531	637	743	849
CIRCLING north side only	650' (614')	650' (614')	890' (854')	890' (854')							

1. GPS required. DME/DME not authorized.
2. Visual descent point (VDP) is where LNAV OCA intersects 3° descent slope.
3. Minimum temperature to use LNAV/VNAV minimums: 0°C.
4. All prohibited areas surface/2500', TNR-3 surface/notam.
5. Bearings are magnetic, altitudes and elevation in feet, heights are relative to AD elevation, distance in NM.