



AIP DUTCH CARIBBEAN

CHANGES: STAR designators.

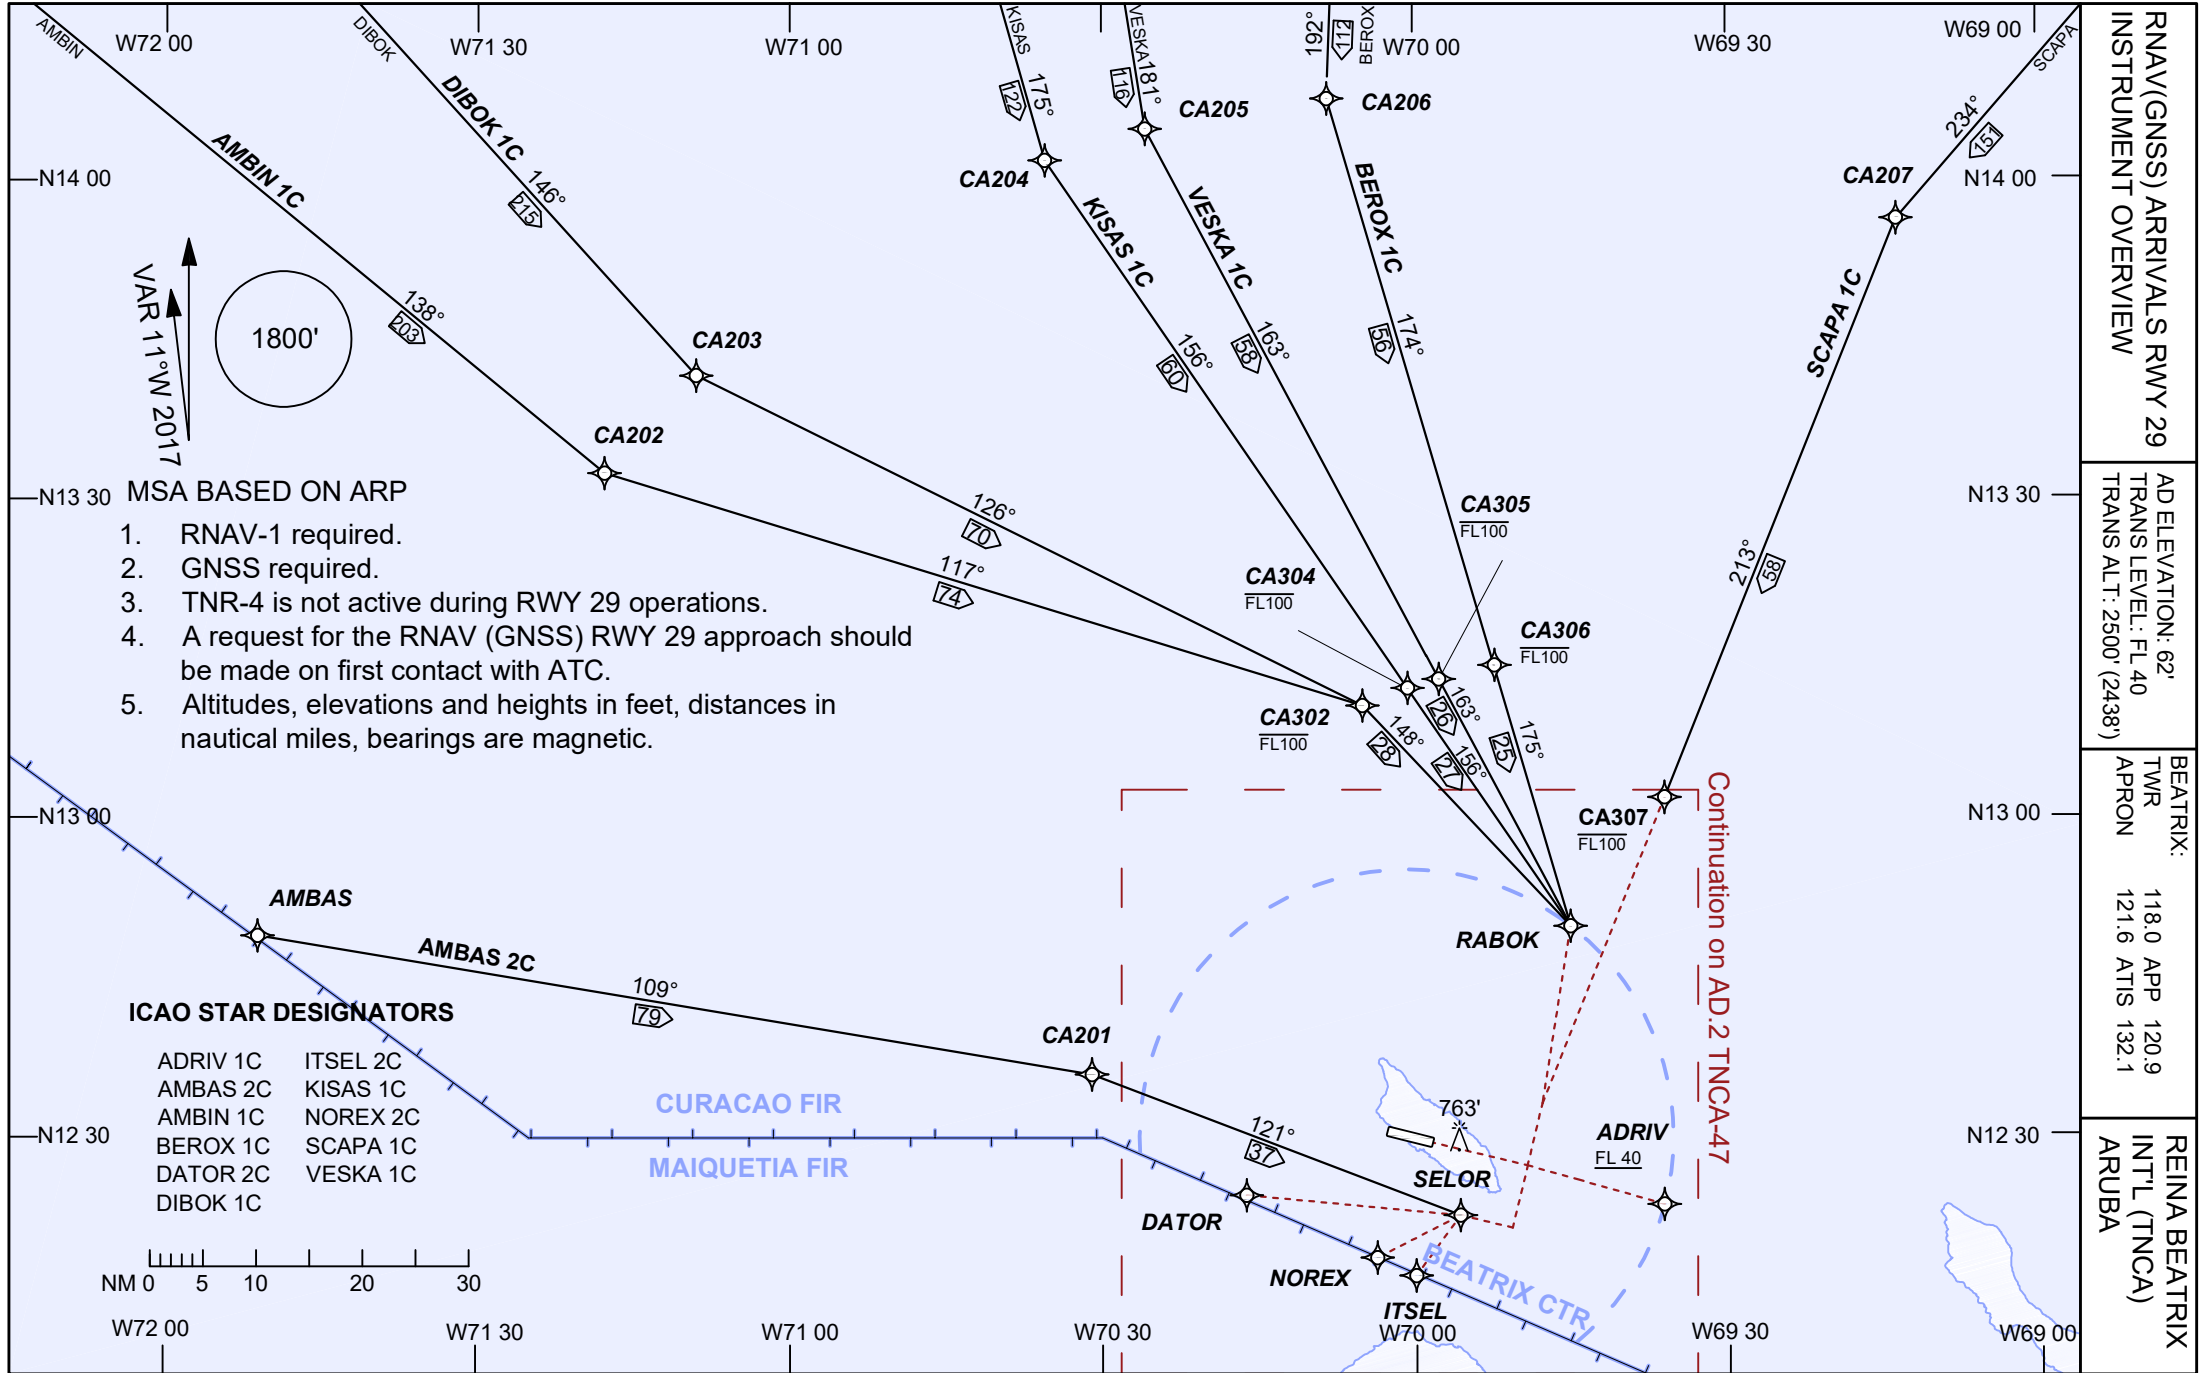

VAR 1°10'W 2017



- MSA BASED ON ARP
1. RNAV-1 required.
  2. GNSS required.
  3. TNR-4 is not active during RWY 29 operations.
  4. A request for the RNAV (GNSS) RWY 29 approach should be made on first contact with ATC.
  5. Altitudes, elevations and heights in feet, distances in nautical miles, bearings are magnetic.

ICAO STAR DESIGNATORS

- |          |          |
|----------|----------|
| ADRIV 1C | ITSEL 2C |
| AMBAS 2C | KISAS 1C |
| AMBIN 1C | NOREX 2C |
| BEROX 1C | SCAPA 1C |
| DATOR 2C | VESKA 1C |
| DIBOK 1C |          |

RNAV(GNSS) ARRIVALS RWY 29 INSTRUMENT OVERVIEW
AD ELEVATION: 62' TRANS LEVEL: FL 40 TRANS ALT: 2500' (2438')
BEATRIX: TWR APRON 118.0 APP 120.9 121.6 ATIS 132.1
REINA BEATRIX INT'L (TNCA) ARUBA

Continuation on AD 2 TNCA-47