


STANDARD DEPARTURE CHART
INSTRUMENT (RNAV) - ICAO

AD ELEVATION: 62
TRANS LEVEL: FL 040
TRANS ALT: 2500 (2438)

BEATRIX:
TWR 118.0 APP 120.9
APRON 121.6 ATIS 132.1

RWY 11
REINA BEATRIX INT'L
(TNCA), ARUBA

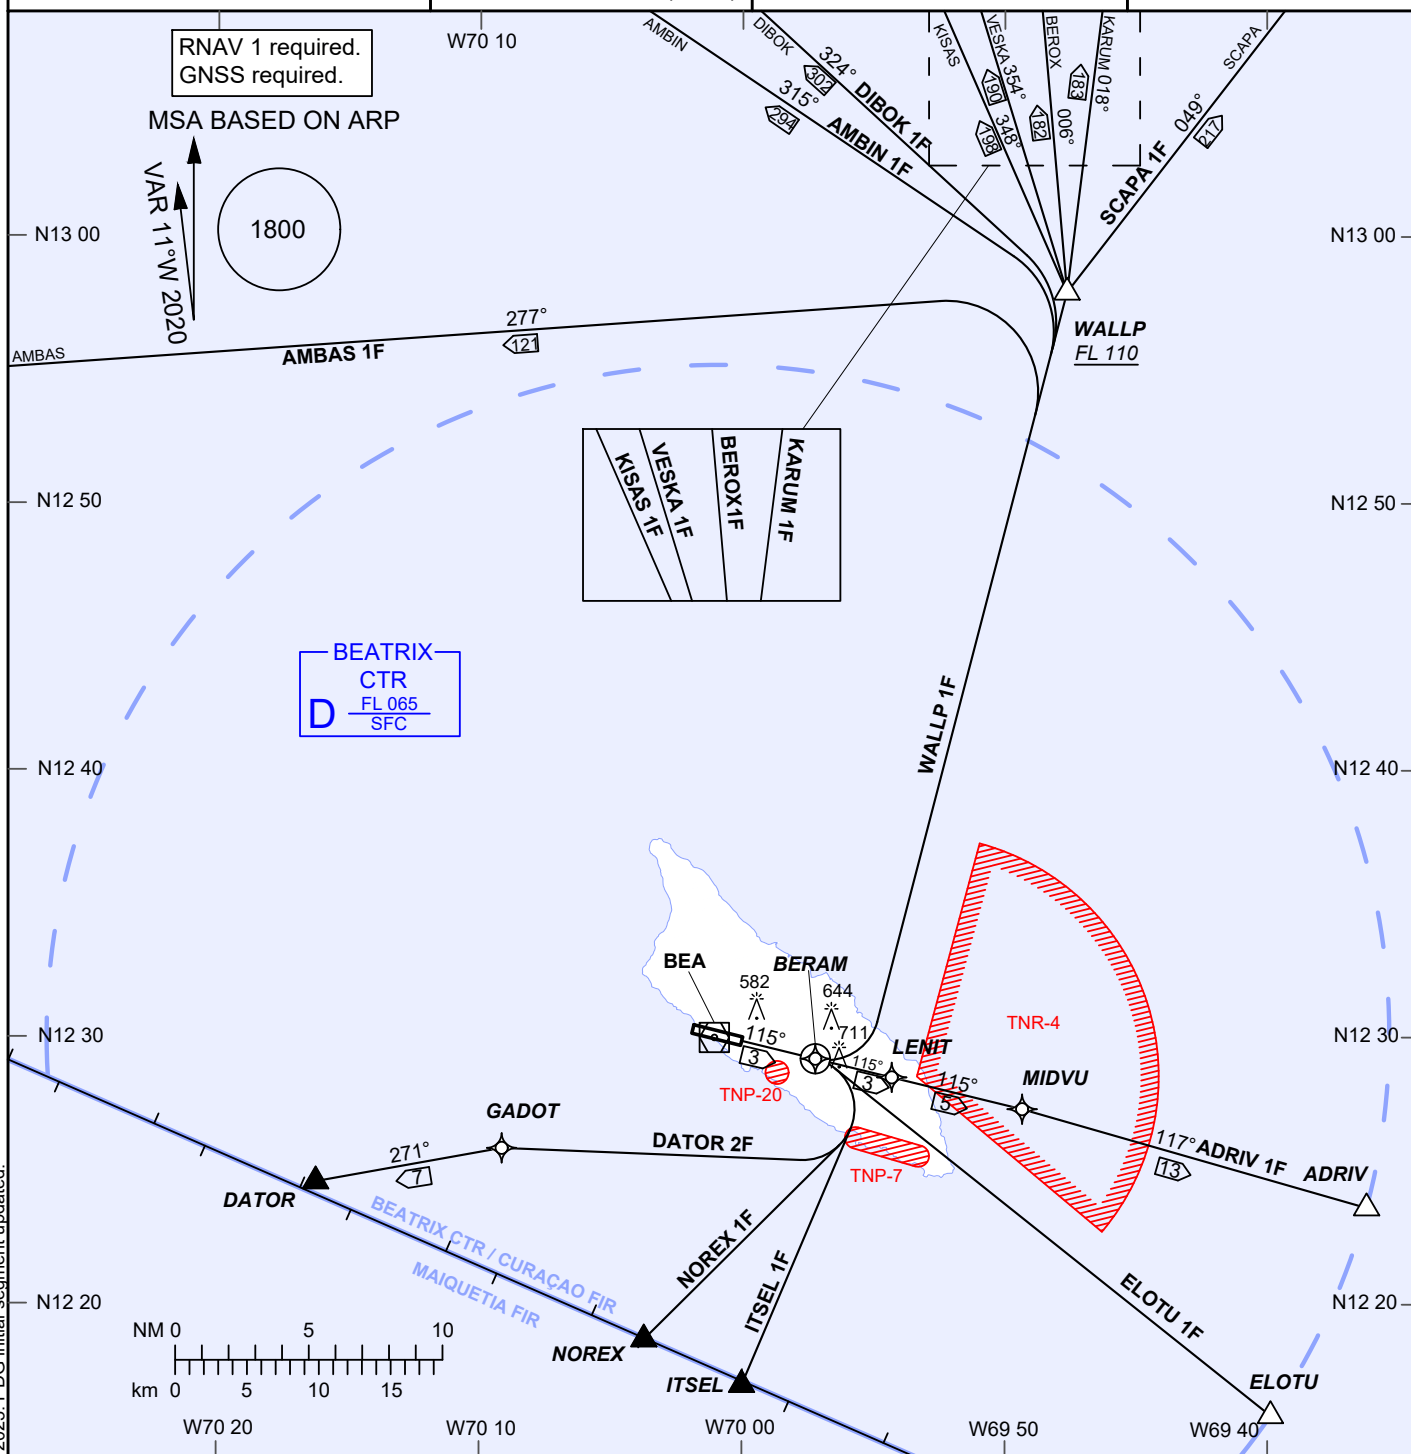

1. BEA VOR 113.8 MHz. Declination 11°W.
2. All SIDs require minimum 245 ft/NM until 1000 ft AMSL.
3. WALLP 1F: After passing WALLP, expect ATC instructions to first en-route waypoint.
4. Advise ATC if unable to climb above TNR-4 ceiling prior to crossing boundary.
5. Altitudes, elevations and heights in feet, distances in nautical miles, bearings are magnetic.

ICAO SID DESIGNATORS

ADRV 1F
AMBAS 1F
AMBIN 1F
BEROX 1F
DATOR 2F
DIBOK 1F
ELOTU 1F

ITSEL 1F
KARUM 1F
KISAS 1F
NOREX 1F
SCAPA 1F
VESKA 1F
WALLP 1F

TNP-7
TNR-4
TNP-20

GND - 2500
SFC-by NOTAM
GND - 2500