



OPERATOR APPROVAL REQUIRED

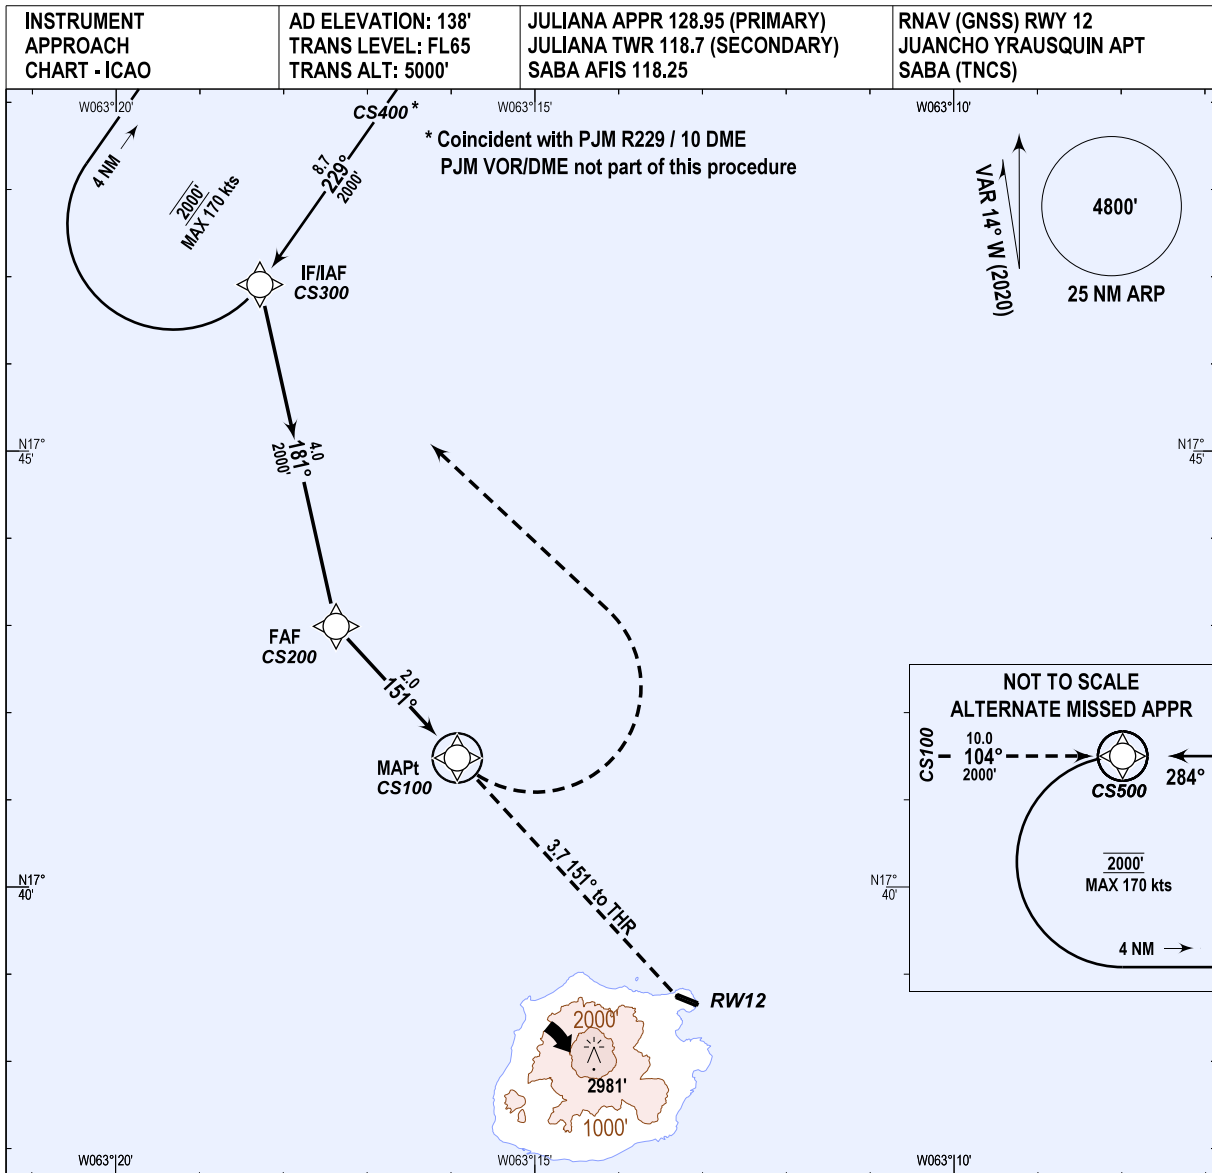

MISSED APCH: Climbing left turn to 2000' direct CS300 and hold.
 ALT MISSED APCH BY ATC: Climbing left turn to 2000' direct CS500 and hold.
 MISSED APCH WITH COMM FAILURE: From holding pattern, proceed to TNCM, execute available approach.

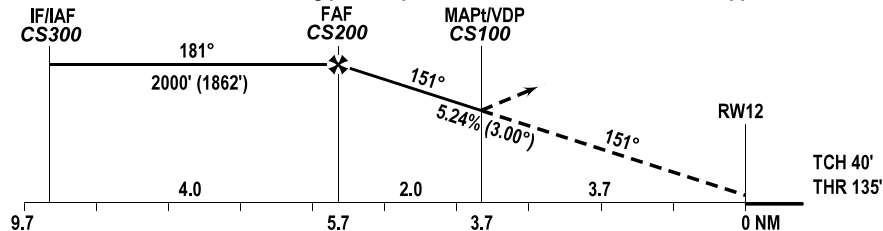

OCA(H)	A	B	GROUNDSPEED - DESCENT RATE					
LNAV	1350' (1212')	1350' (1212')						
Circling north side only	1350' (1212')	1350' (1212')						

CHANGES: Editorial.

1. Caution: Observe published wind speed limitations.
2. GNSS required, DME/DME not authorized.
3. Visual descent point (VDP) is where LNAV OCA intersects 3° descent slope.
4. Bearings are magnetic, altitudes and elevation in feet, heights are relative to AD elevation, distance in NM.

