


[illegible]

MISSED APCH WITH COMM FAILURE: From holding pattern, proceed to TNCM, execute available approach.

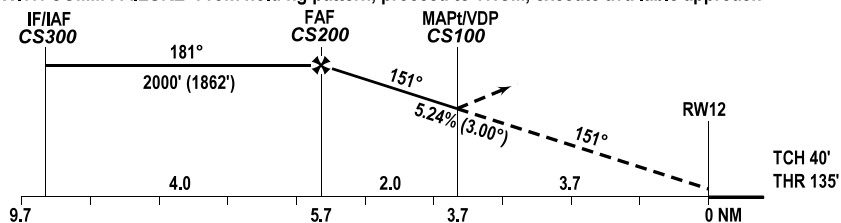

OCA(H)	A	B			GROUNDSPEED - DESCENT RATE						
LNAV	1350' (1212')	1350' (1212')			KNOTS	70	90	100	120	140	160
Circling north side only	1350' (1212')	1350' (1212')			FT/MIN	372	478	531	637	743	849

1. Caution: Observe published wind speed limitations.
2. GNSS required. DME/DME not authorized.
3. Visual descent point (VDP) is where LNAV OCA intersects 3° descent slope.
4. Bearings are magnetic, altitudes and elevation in feet, heights are relative to AD elevation, distance in NM.



➤ Fly-over on demand reporting wpt



- Fly-by on demand reporting wpt